

# Polycom RealPresence Mobile for Apple iOS

## Contents

What's New in This Release .....	1
Release History .....	2
Security Updates .....	3
Hardware and Software Requirements .....	3
Products Tested with This Release .....	4
Install and Uninstall RealPresence Mobile .....	6
System Constraints and Limitations .....	6
Resolved Issues .....	9
Known Issues .....	9
Interoperability Issues .....	11
Enterprise Scalable Video Coding (SVC) Solution .....	13
Access Media Statistics .....	15
Prepare Your Device for Mutual Transport Layer Security .....	16
Get Help .....	18
Related Poly and Partner Resources .....	18
Copyright and Trademark Information .....	18

## What's New in This Release

Polycom RealPresence Mobile 3.11.2 is a maintenance release that includes the following features:

- Support for using H.323 ID or endpoint name as the site name. Previously, RealPresence Mobile sends the iOS device name as the site name to the far end.
- Bug fixes.

### ***Support for Using H.323 ID or Endpoint Name as the Site Name***

Now, the RealPresence Mobile uses the H.323 ID or endpoint name as the site name. Previously, it sent the iOS device name as the site name to the far end.

## Release History

This following table lists the release history of Polycom RealPresence Mobile application.

### Release History

Release	Release Date	Features
3.11.2	December 2020	Support for using the H.323 ID or endpoint name as the site name Bug fixes
3.11.1	December 2020	Support for iOS 13 Bug fixes
3.11	December 2019	Support for auto rotation on Apple iPhone devices Bug fixes
3.10.1	May 2019	New option for sharing customer information with Polycom
3.10	April 2019	Support for clicking the URL of a new format that contains the user token to join a meeting Supports new devices Defect fixes
3.9.1	September 2018	Supports new devices Defect fixes
3.9	January 2018	Dropped support for automatic detection of Polycom SmartPairing New device and OS support
3.8	September 2017	Support for receiving 1080p content Disable Remember Password feature Dropped support for Polycom Concierge Startup Option Settings on Apple iPad Use Apple Siri to launch RealPresence Mobile on Apple iPhone
3.7	December 2016	Audio enhancement Video enhancements UI enhancements CallTo feature support New device support New OS Support
3.5.1	April 2016	Constant Bitrate (CBR) adopted for video codecs Bug fixes and feature enhancements
3.5	January 2016	Polycom Concierge Solution support for Apple iPhones TLSv2 support SmartPairing support for Polycom RealPresence Debut products New devices support
3.4.1	July 2015	Support for Cloud Services

**Release History**

Release	Release Date	Features
3.4	June 2015	Profile Photo and Virtual Business Card Feature Mid-string Search of Favorites Support for Polycom NoiseBlock In-call Toolbar User Interface Enhancement Support for 64-bit iOS Platform
3.3	January 2015	Support for BroadSoft Device Management as Provisioning Server User Interface Improvements Standalone mode provides more features. See <a href="#">System Capabilities and Constraints</a> for a complete list of feature capabilities. Support for high video resolution (720p) on powerful mobile devices such as iPad Air and iPad Mini 2, for AVC point to point calls, AVC multi-points calls, and SVC point to point calls. Support for the SDP Size Adjustment Feature Devices Support Changes <ul style="list-style-type: none"> <li>• Drop support for iOS 6</li> <li>• Add support for iOS 8</li> <li>• Add support for iPad Air 2 and iPad Mini 3</li> <li>• Add support for iPhone 6 and iPhone 6 Plus</li> </ul>
3.2.1	July 2014	The <b>Roster</b> display button is not shown in CloudAXIS 1.5 and earlier versions. Fixed an OpenSSL security vulnerability (CVE-2014-0224). Fixed two issues. See <a href="#">Resolved Issues</a> for details.
3.2	June 2014	Support for CloudAXIS HTTPs tunneling Support for roster display in a CloudAXIS meeting Support for log collector Support for Czech Support for iPad Air and iPad Mini with Retina display

## Security Updates

Please refer to the [Poly Security Center](#) for information about known and resolved security vulnerabilities.

## Hardware and Software Requirements

The following hardware requirements were determined based on test scenarios. Your system's actual performance may vary based on software or hardware configurations.

Items	Description
Apple	iPhone and iPad devices that support iOS 11, iOS 12, iOS13, or iOS 14
iOS Requirements	iOS 11, 12, 13, and 14

Items	Description
Network Requirements	Wireless Local Area Network (WLAN), 802.11 a/b/g/n. 3G or 4G network
Optional Peripheral Devices	3.5 mm headset Stereo Bluetooth headset

### To view your iOS system version:

- » Go to **Settings > General > About > Version**.

## Polycom RealPresence Resource Manager System

The RealPresence Mobile application can register to the Polycom RealPresence Resource Manager server. Some management features have limitations relative to other Polycom endpoints. For example, software updates of RealPresence Mobile are not supported and the QOS monitoring is limited.

## Products Tested with This Release

The Polycom RealPresence Mobile application is tested with other products. The following list is not a complete inventory of compatible equipment. It indicates the products that have been tested for compatibility with this release.



Polycom recommends that you upgrade your Polycom devices with the latest software versions, as compatibility issues may already have been addressed by software updates. See the [Current Polycom Interoperability Matrix](#) to match product and software versions.

### Products Tested with this Release

Type	Product	Tested Versions
Gatekeeper, Gateways, External MCU, Bridges, Call Managers	Polycom Distributed Media Application (DMA) 7000	10.0.0.7
	Polycom RealPresence Resource Manager	10.8
	Polycom RealPresence Collaboration Server (RMX) 4000/2000/1800/1500	8.8.0, 8.7.5
	Polycom RealPresence Collaboration Server, Virtual Edition	8.8.0, 8.7.5
	Polycom RealPresence Web Suite	2.2.2, 2.2.3

---

Type	Product	Tested Versions
Endpoints	Polycom RealPresence Group Series	6.2.2
	Polycom HDX 4500	3.1.14
	Polycom RealPresence Desktop	3.11.2
	Polycom RealPresence Mobile	3.11.2
	Poly Studio X50	3.1.3

# Install and Uninstall RealPresence Mobile

This section explains how to install and uninstall RealPresence Mobile.





The RealPresence Mobile user interface supports the following languages: English, International Spanish, French, German, Korean, Japanese, Russian, Portuguese, Czech, Simplified Chinese, and Traditional Chinese.

## To install the RealPresence Mobile application:

- 1 Go to the Apple Store, search for **Polycom** or **video conferencing** to find the RealPresence Mobile application.
- 2 Tap **Free** and then **INSTALL APP**.

## To uninstall the RealPresence Mobile application:

- 1 Go to the device's application list.
- 2 Tap and hold **Video**  until it begins to jiggle.
- 3 Tap **Delete**  and then tap **Delete**. Your user data is deleted when you uninstall this application.

# System Constraints and Limitations

The following sections provide information on constraints and limitations when using Polycom RealPresence Mobile application.

## Capabilities

The following video capabilities are supported for RealPresence Mobile.

Call Rate	Video Capability
1 Mbps	720p
512 kbps 384 kbps 256 kbps	480x270
128 kbps	240x135
64 kbps	Audio only

## Protocols

The following table lists the protocols supported in this version of the RealPresence Mobile application.

Protocol	Description
DNS	Domain Name System
H.235	Security and Encryption
H.239	Token Management
H.323	Signaling
H.460	Firewall/NAT Traversal
LDAP, H.350	Directory Services
NTLMv2	Authentication
Polycom Lost Packet Recovery (LPR)	Lost Packet Recovery
SIP	Session Initiation Protocol

## Resolutions

The following table lists the resolutions supported in this version of the RealPresence Mobile application.

Resolution and Frame Rate	Source
Up to 720p, 15 fps	People video sent from camera
Up to 720p, 30 fps	People video received from far end
Up to 1080p, 15 fps	Content received from far end
Up to XGA (1024x768) / 5 fps	Content showing from the ipad



Actual transmitted video resolution is determined by several factors, such as camera capability, computer performance, network conditions, the far-end system's capabilities, and whether content is being received.

HD/720p 30 fps is the maximum video receiving capability. The actual resolution is based on the negotiation with the far end.

## Algorithms

The following table lists the algorithms supported in this version of the RealPresence Mobile application.

Algorithm Type	Description
Audio	G.722.1 Annex C G.711u G.711a Siren LPR Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Scalable Audio Coding (SAC)
Video	Polycom Lost Packet Recovery (LPR) H.264 SVC H.264 AVC H.264 high profile H.263 and H.263+ (for content only) <b>Note:</b> H.261 is not supported.
Encryption	AES-128 media encryption TLS for SIP calls

## Inbound and Outbound Ports

The following table lists the inbound and outbound ports supported in this version of the RealPresence Mobile application.

Port	Function
1720 (TCP)	H.323 Call Signaling (H.225)
1719 (UDP)	H.323 Registration, Admission, and Status (RAS)
3230 - 3250 (TCP)	H.323 Call Control (H.245)
3230 - 3250 (UDP)	Media (RTP/RTCP)
3238 (UDP and TCP)	BFCP
5060 (UPD and TCP)	SIP

Port	Function
443 (TCP)	Provisioning, Monitoring, Help Files, HTTPS
389 (TCP)	LDAP
5060 (UDP and TCP)	SIP



Port	Function
5061 (TCP)	SIP TLS signaling
1720 (TCP)	H.323 Signaling (H.225)
1719 (UDP)	H.323 Registration, Admission, and Status (RAS)
3230 - 3250 (TCP)	H.323 Control (H.245)
3230 - 3250 (UDP)	Media (RTP/RTCP)
3238 (UDP and TCP)	BFCP

## Resolved Issues

The following table lists the resolved issues in this release.

Issue #	Description
EN-181852	When you provision RealPresence Desktop or RealPresence Mobile using RealPresence Resource Manager, the NAT configurations in the provisioning profile don't work.
EN-166997	The RealPresence Mobile <b>Decline</b> button doesn't work when you hold your iPhone in the portrait mode.
EN-179471	You can't call contacts when RealPresence Mobile works in standalone mode. The <b>Call</b> button doesn't show up on the screen.
EN-174423	(iOS version 3.11.1 only) RealPresence Mobile always uses the WLAN Call Rate for 3G or 4G networks, regardless of the 3G/4G Call Rate setting.
EN-150871	The RealPresence Mobile applications provisioned by RealPresence Resource Manager through RealPresence Access Director with domain accounts are unable to search for LDAP contacts if SMBv2 is used.

## Known Issues

The following table lists all known issues and suggested workarounds for Polycom RealPresence Mobile application.



These release notes do not provide a complete listing of all known issues that are included in the software. Issues not expected to significantly impact customers with standard voice or video conferencing environments may not be included. In addition, the information in these release notes is provided as-is at the time of release and is subject to change without notice.

**Known Issues**

<b>Issue ID</b>	<b>Description</b>	<b>Workaround</b>
EN-129145	When SMB 2.0 is enabled on both of RealPresence Resource Manager and the AD server, RealPresence Mobile may fail to connect to RealPresence Resource Manager if <code>SmbServerNameHardeningLevel</code> is not set to 0 on the AD server.	Set <code>SmbServerNameHardeningLevel</code> to 0
EN-125869	Rarely, after you click the new format URL that contains the user token to join a meeting, you can't hear others and others can't hear you.	Do one of the following: <ul style="list-style-type: none"> <li>• Swipe up the Home bar or click the Home button to leave your RealPresence Mobile app, then open it again.</li> <li>• Drop the call, click the URL to rejoin the meeting.</li> </ul>
EN-120565	You can't view the call statistics for the first time you click the <b>Call Statistics</b> icon.	Click the icon again.
EN-118161	If you use the new format URL to join a meeting and your RealPresence Mobile on iPhone XS Max or iPhone XS fails to register to RealPresence Resource Manager, you may see RealPresence Mobile displays abnormally.	None.
EN-65381	When the system volume of the iPhone X is set to the minimum, if you end the call and reconnect the call, and then adjust the volume to the maximum, the volume is still too low.	Do the following: <ol style="list-style-type: none"> <li>1 Set system volume as the maximum.</li> <li>2 End the call and reconnect.</li> </ol> The volume will be changed to loud.
EN-63350	Sometimes, RealPresence Mobile on the iPhone X/iPhone 8 Plus cannot receive and transmit audio after you plug and unplug the earphone.	None.
SWEP-10627	The RealPresence Mobile cannot sign in successfully through Polycom RealPresence Access Director. The error message is 'Invalid server'.	Do the following: <ol style="list-style-type: none"> <li>1 From Polycom RealPresence Access Director administrator portal, go to <b>Configuration &gt; Access Proxy &gt; Https proxy</b>.</li> <li>2 Change the rule of the Polycom RealPresence Resource Manager to make it the highest priority.</li> </ol>
SWEP-10435	You cannot share live streaming video from YouTube. The far ends always see a black content screen.	None. This is not a Polycom problem. The RealPresence Mobile application uses Apple API to capture content screenshots. However, this API doesn't support live streaming content.

**Known Issues**

Issue ID	Description	Workaround
SWEP-9369	If you switch to another application when you are dialing a number, the RealPresence Mobile application crashes.	Avoid switching to another application while placing a call. Wait until the call completes to open other applications.
SWEP-8960	You cannot share pictures or PDF files from the Dropbox application in SVC calls.	None. This is the designed behavior.
EN-162035	During the enterprise user sign-in process, the application doesn't validate the IP format entered in the <b>Server</b> field.	None.
EN-163071	There are two broken links in the <b>License Agreement</b> page (accessing from the <b>About</b> menu option).	None.

## Interoperability Issues

You may encounter the following issues when using RealPresence Mobile with other products or on specific operating systems.

**Interoperability Issues Related to Operation System or Devices**

Description	Solution
RealPresence Mobile doesn't fit into the screen of iPad Pro 11" A1980.	None
On some iPads with poor CPU performance, when RealPresence Mobile sends PDF content, the video may freeze on far ends every three seconds.	None
Audio may stop in the first few seconds when plugging in an earphone in a call on iPhone 6.	None This is a device issue.
If you create a Continuous Presence (CP) only conference call on Polycom RealPresence Collaboration Server (RMX) 4000/2000 system and Polycom RealPresence Collaboration Server 800s version 8.1 with default content settings ( <b>Content Settings: HiResGraphics</b> and <b>Content Protocol: H.264 HD</b> ), the RealPresence Mobile application cannot send or receive content if call rate is set as 384 kbps or below.	<ul style="list-style-type: none"> <li>Change the RealPresence Collaboration Server (RMX) <b>Content Settings</b> to <b>Graphics</b>, and <b>Content Protocol</b> to <b>H.263 &amp; H.264 Auto Selection</b>.</li> <li>Set the call rate on RealPresence Mobile to above 384 kbps.</li> </ul>
Polycom VSX Visual Concert cannot display 1024x576 content sent by RealPresence Mobile, whether or not they call each other directly.	Double-click the content to show the content in full screen, then RealPresence Mobile will send 1024x768 content, and the Polycom VSX Visual Concert can display correctly.
RealPresence Mobile may consume more than one license on RealPresence Resource Manager if you install and uninstall RealPresence Mobile several times.	Configure the reclaim period on RealPresence Resource Manager to a small value (for example five minutes).

**Interoperability Issues Related to Operation System or Devices**

Description	Solution
RealPresence Mobile supports only using English user names and password to sign in Polycom CMA server and RealPresence Resource Manager, or to register to a gatekeeper or an SIP server.	Use English user name and password.
In a motion mode conference, RealPresence Mobile receives video with a long delay because the video is 60 fps.	Set a conference with sharpness mode on MCU.
RealPresence Mobile in internet may fail to call Telepresence m100 in intranet.	Let Telepresence m100 call RealPresence Mobile.
You may hear a short audio glitch on RealPresence Mobile when dialing in an SIP AVC encrypted conference created on the RealPresence Collaboration Server (RMX) 4000 with NGB.	None

## Enterprise Scalable Video Coding (SVC) Solution

Limitation Type	Description	Solution
Limitations Related to Operation System or Devices	On some iPads with poor CPU performance, when RealPresence Mobile sends PDF content, the video may freeze on far ends every three seconds.	None
	Audio may stop in the first few seconds when plugging in an earphone in a call on iPhone 6.	None This is a device issue.
Limitations Related to Other Polycom Products	If you create a Continuous Presence (CP) only conference call on Polycom RealPresence Collaboration Server (RMX) 4000/2000 system and Polycom RealPresence Collaboration Server 800s version 8.1 with default content settings ( <b>Content Settings: HiResGraphics</b> and <b>Content Protocol: H.264 HD</b> ), the RealPresence Mobile application cannot send or receive content if call rate is set as 384 kbps or below.	<ul style="list-style-type: none"> <li>Change the RealPresence Collaboration Server (RMX) <b>Content Settings</b> to <b>Graphics</b>, and <b>Content Protocol</b> to <b>H.263 &amp; H.264 Auto Selection</b>.</li> <li>Set the call rate on RealPresence Mobile to above 384 kbps.</li> </ul>
	Polycom VSX Visual Concert cannot display 1024x576 content sent by RealPresence Mobile, whether or not they call each other directly.	Double-click the content to show the content in full screen, then RealPresence Mobile will send 1024x768 content, and the Polycom VSX Visual Concert can display correctly.
	RealPresence Mobile may consume more than one license on RealPresence Resource Manager if you install and uninstall RealPresence Mobile several times.	Configure the reclaim period on RealPresence Resource Manager to a small value (for example five minutes).
	RealPresence Mobile supports only using English user names and password to sign in Polycom CMA server and RealPresence Resource Manager, or to register to a gatekeeper or an SIP server.	Use English user name and password.
	In a motion mode conference, RealPresence Mobile receives video with a long delay because the video is 60 fps.	Set a conference with sharpness mode on MCU.
	RealPresence Mobile in internet may fail to call Telepresence m100 in intranet.	Let Telepresence m100 call RealPresence Mobile.
	You may hear a short audio glitch on RealPresence Mobile when dialing in an SIP AVC encrypted conference created on the RealPresence Collaboration Server (RMX) 4000 with NGB.	None

The Enterprise Scalable Video Coding (SVC) solution is an alternative to the AVC mode that has traditionally

been supported. Differences between the two modes are listed in the following table.

SVC Mode	AVC Mode
Each participant in the conference call is received by the client as a separate video stream.	The composite video image is determined by the bridge based on administrator configuration.
A Caller ID is indicated by text in the appropriate window, on display throughout the call.	Caller ID information is displayed intermittently.
<p>Double-clicking or tapping on a participant's video, content video, or local preview expands that video to full screen. Double-clicking or tapping again reverts the display to the composite image.</p> <p>Pinch controls enable you to zoom in and out on a participant's video or content video.</p>	Layout may typically be controlled by dialing ** and then selecting a format.


The SVC solution provides the following features:

- For video send and receive, support up to 720p on high performance devices under 1 Mbps call rate.
- For video send, support 7.5/15 fps
- For video receive, support 7.5/15/30 fps
- Support auto layouts of 1x1, 1+1 through 1+5  
The maximum layout of 1+5 comprises four remote participants plus one content-sharing frame, and one local preview frame
- Support for AVC content
- Support for Scalable Audio Coding (SAC) with at least two quality layers
- Ability to mix up to three different audio streams from the MCU
- Ability to combine up to four different SVC video streams (call rate at 512kbps and above) from the MCUs
- Support for SVC dial-out from RealPresence DMA

Using SVC conference calls has following limitations:

- Does not support recording
- Does not support Far-end Camera Control (FECC)
- In a SIP call, when networks using UDP experience 10 percent packet loss, the screen layout on received devices can be incorrect
- Does not support H.323 call
- In a poor network connection, sometimes a participant disconnects automatically from an SVC call. This can result in a frozen video stream of the participant. The RealPresence RMX system will clear the frozen stream in 30 minutes
- Do not use 128 kbps if you share content in a SVC call, otherwise people's video will freeze while sending or receiving content

## Access Media Statistics

To access media statistics, click **Statistics** . The following table shows the meaning of each value.

Value	Description
Call Type	SIP or H.323 call type.
Call Encryption	Indicates whether your call is encrypted.
Far Site Name	Name of the far site.
Far Site System	Type of video conferencing system at the far end and the software version.
Call Speed	Negotiated speed (bandwidth) for the call, which is usually the combined video and audio speeds in the call.
Video Protocol	ITU-C video algorithm and annexes used in the current call. The video protocol used depends on the capabilities of the system at the far end as well as on your system's configuration.
Video Format	Picture size currently in use.
Audio Protocol	Audio algorithm and annexes used in the current call. The audio protocol used depends on the capabilities of the system at the far end as well as on your system's configuration.
Audio Rate	Bandwidth specified for the audio portion of the call. The proportion of the audio rate to the video rate depends on the protocol used.
Video Rate	Bandwidth specified for the video portion of the call. The proportion of the video rate to the audio rate depends on the protocol used.
Video Rate Used	Actual bandwidth being used for the video portion of the call. This is a real-time measurement, which normally fluctuates.
Video Frame Rate	Rate your system uses to update the picture seen at the far end. The system can send up to 15 fps. If the camera picks up large, continuous, or frequent motions, the software takes longer to assemble the data into video frames, and the frame rate drops. Changes in lighting also reduce the frame rate.
Video Packets Loss Percentage	Total video packet loss as a percentage of the total number of video packets transmitted by your system and those transmitted by the far end.
Video Jitter	Percentage of variation in the video transmission rate.
Audio Packet Lost	Number of audio data packets lost during the call, including transmitted packets and incoming packets. Packet loss indicates congestion or other problems on the network.
Audio Packets Loss Percentage	Total audio packet loss as a percentage of the total number of audio packets transmitted by your system and those transmitted by the far end.
Audio Jitter	Percentage of variation in the audio transmission rate.
Content Protocol	Format used for the recording, compression, and distribution of the content.
Content Format	Display resolution of the content.
Content Rate	Rate your system uses in content transmission.

Value	Description
Content Rate Used	Actual bandwidth being used for the content transmission.
Content Frame Rate	Rate your system uses in content frame transmission.
Content Packets Lost	Number of content data packets lost during the call, including transmitted packets and incoming packets. Packet loss indicates congestion or other problems on the network.
Content Packets Loss Percentage	Total audio packet loss as a percentage of the total number of content packets transmitted by your system and those transmitted by the far end.

## Prepare Your Device for Mutual Transport Layer Security

You can establish secure communications using Mutual Transport Layer Security (MTLS) with provisioning servers such as Polycom RealPresence DMA or RealPresence Resource Manager systems.

To establish MTLS connections, the client and server need to hold certificates issued from the same Certificate Authority (CA) and the root certificate of this CA.

To import certificates into your iPad, you need to generate a Certificate Request (CSR) first by using a computer that has installed the OpenSSL tool. This is an iOS limitation.

The following example uses Mac as the example.

### To generate and import your certificate:

- 1 Open the Terminal from your Mac computer.
- 2 Generate the private key *client.key*. For example:  

```
Mike-MacBook-Pro:~ root# openssl genrsa -out client.key 1024
```
- 3 Generate the certificate request *client.csr*. For example:  

```
Mike-MacBook-Pro:~ root# openssl req -new -key client.key -out client.csr
```
- 4 You are about to be asked to enter information that will be incorporated into your certificate request. Enter the Distinguished Name (DN) information that will be incorporated into your certificate request. You can leave some of the fields blank.  

```
For som-----
Country Name (2 letter code) [GB]:cn          ---CSR info.
State or Province Name (full name) [Berkshire]:bj ---CSR info.
Locality Name (eg, city) [Newbury]:bj      ---CSR info.
Organization Name (eg, company) [My Company Ltd]:plcm ---CSR info.
Organizational Unit Name (eg, section) []:caqa ---CSR info.
Common Name (eg, your name or your server's hostname) []:caqa ---CSR info.
E-mail Address []:pp@pp.com ---CSR info.
```
- 5 Enter the following extra attributes to be sent with your certificate request. Write down the challenge password. You will need it later in the procedure.  

```
A challenge password []:1234          -----see [Notel]
```



An optional company name []:poly

**6** Submit the certificate request to your CA:

- a** View the content of the file *client.csr* using the following command, then select and copy its content (from ---BEGIN CERTIFICATE REQUEST to END CERTIFICATE REQUEST---):

```
Mike-MacBook-Pro:~ root# cat client.csr
```

- b** Go to your CA's web interface <http://<CA's IP address>/certsrv/>, and click **Request a certificate**.
- c** Click **Advanced certificate request**.
- d** Click **Submit a certificate request by using a base-64-encoded CMC or PKCS #10 file, or submit a renewal request by using a base-64-encoded PKCS #7 file**.
- e** Paste the content of the file *client.csr* to the **Saved Request** text field, and click **Submit**.
- f** Click **Base 64 encoded** and click **Download certificate**.

The file is saved as *certnew.cer* by default in the folder **Downloads**.

**7** Move the generated **certnew.cer** file to your current directory.

**8** Convert the file *ccertnew.cer* to a .p12 file by using the OpenSSL tool. For example:

```
Mike-MacBook-Pro:~ root#openssl pkcs12 -export -in certnew.cer -inkey
client.key -out client.p12 -name testp12
```

Enter Export Password:


Verifying - Enter Export Password:

The export password should be the same as the challenge password you set in Step [3](#).

**9** Encrypt the challenge password you set in Step [3](#):

- a** Go to [Convert Strings](#).
- b** Enter the challenge password in the text field, and click **Base64 Encode!**.
- c** Copy the encoded text from the following text field, and save it as a .pwd file, for example, *client.pwd*.

**10** Add both *client.p12* and *client.pwd* to your iPad using iTunes.

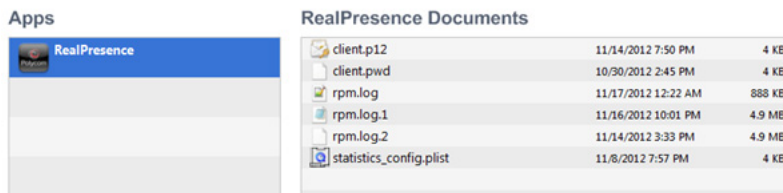

**To import the root certificate of your CA into your iPad:**

- 1 Go to your CA's web address <http://<MCA's IP address>/certsrv/>, click **Download a CA certificate, certificate chain, or CRL**.
- 2 Select **Base 64**, and click **Download CA Certificate**.
- 3 Send the certificate to your iPad as an email attachment.
- 4 On your iPad, open the attached certificate from your email, and then click **Install**.

- 5 When prompted to install the profile, tap **Install Now**, and then tap **Done**.

The certificate is now installed on your iPad. You can find it from your iPad **Settings > General > Profile > Configuration Profiles**.



To establish MTLS connection with servers such as Polycom RealPresence DMA or RealPresence Resource Manager systems, these systems should also hold the CA root certificate and the system's certificates.

## Get Help

For more information about installing, configuring, and administering Poly products or services, go to the Poly site, click Support, and choose the option best suited to your needs.

## Related Poly and Partner Resources

See the following sites for information related to this product.

- The [Poly Online Support Center](#) is the entry point to online product, service, and solution support information including Licensing & Product Registration, Self-Service, Account Management, Product-Related Legal Notices, and Documents & Software downloads.
- The [Polycom Document Library](#) provides support documentation for active products, services, and solutions. The documentation displays in responsive HTML5 format so that you can easily access and view installation, configuration, or administration content from any online device.
- The [Poly Community](#) provides access to the latest developer and support information. Create an account to access Poly support personnel and participate in developer and support forums. You can find the latest information on hardware, software, and partner solutions topics, share ideas, and solve problems with your colleagues.
- The [Poly Partner Network](#) are industry leaders who natively integrate the Poly standards-based RealPresence Platform with their customers' current UC infrastructures, making it easy for you to communicate face-to-face with the applications and devices you use every day.
- The [Polycom Collaboration Services](#) help your business succeed and get the most out of your investment through the benefits of collaboration.

## Copyright and Trademark Information

© 2020 Plantronics, Inc. All rights reserved. No part of this document may be reproduced, translated into another language or format, or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Plantronics, Inc.

Plantronics, Inc. (Plantronics + Polycom, Now together as Poly)

345 Encinal Street

Santa Cruz, California

95060

Poly and the propeller design are trademarks of Plantronics, Inc. All other trademarks are the property of their respective owners.

**Patent Information** The accompanying product may be protected by one or more U.S. and foreign patents and/or pending patent applications held by Polycom, Inc.

**Open Source Software Used in this Product** This product may contain open source software. You may receive the open source software from Polycom up to three (3) years after the distribution date of the applicable product or software at a charge not greater than the cost to Polycom of shipping or distributing the software to you. To receive software information, as well as the open source software code used in this product, contact Polycom by email at [OpenSourceVideo@polycom.com](mailto:OpenSourceVideo@polycom.com).

**Customer Feedback** We are striving to improve our documentation quality and we appreciate your feedback. Email your opinions and comments to [DocumentationFeedback@polycom.com](mailto:DocumentationFeedback@polycom.com).

**Polycom Support** Visit the [Polycom Support Center](#) for End User License Agreements, software downloads, product documents, product licenses, troubleshooting tips, service requests, and more.